
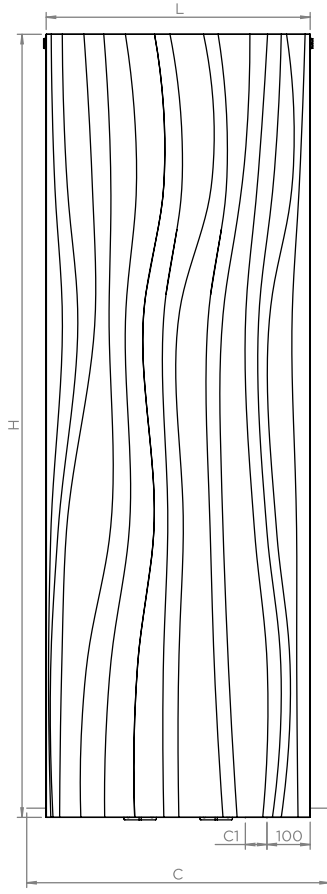


FLUENT - FLU186


INS-VS1

ALL MEASUREMENTS ARE IN MILLIMETRES


MANUFACTURED FROM ALUMINIUM

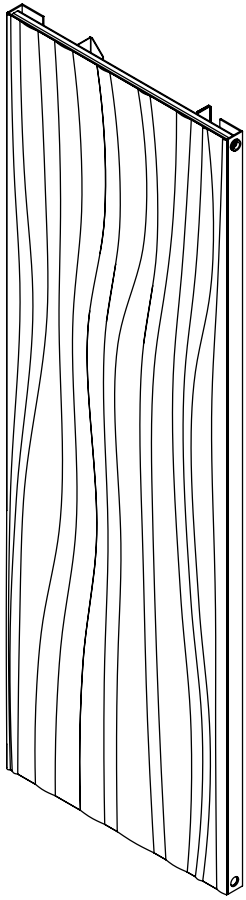


Front View



Side View

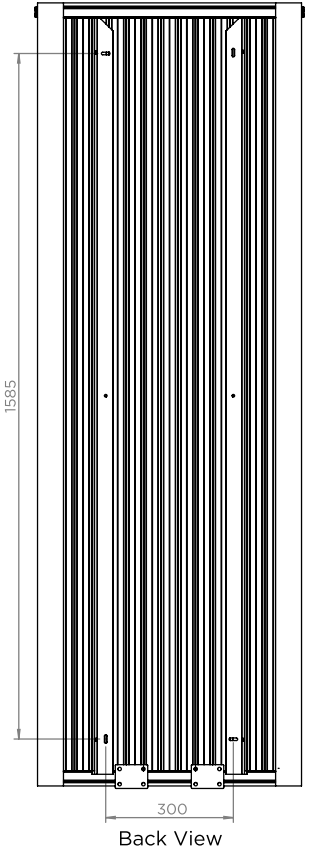

Back View




Top View

Installation Accessories:



Plumbing Position:



Please observe that the collector fitted with a flow diverter is mounted at the bottom. This can be verified by visually checking or by referring to the installation diagram

When installing heating element, please knock through the centre hole of the diverter using a suitable rod. Please remove the disk if it comes loose and can be removed from a tapping

Vertical mount
All Dimensions are in mm
Max. Working Pressure: 10 Bar
Max. Working Temperature: 95° C
Inlet / Outlet : 1/2" BSP
Fuel : E/H/D

Manufacturing Tolerance : + 5 mm

PRODUCT CODE	Height	Length	Depth	Pipe Centres	Bracket Centres
	H mm	L mm	D mm	C1-C mm	FL-F2 S mm
FLU186	1810	605	45	50-700	791-794 300

Technical specifications are subject to change without prior notice.



AEON is the designer heating division of Pitacs Limited.
Pitacs Limited, Bradbourne Point, Bradbourne Drive, Tilbrook, Milton Keynes,
Buckinghamshire, MK7 8AT, UK

T: +44 (0)1908 271155 E: info@pitacs.com W: www.aeon.uk.com